# G2511-115

Printed Matter No. 9836 9882 01 Publication Date 2019-11-08 Grinder

Valid from Serial No. A5370001

**Product Instructions** 

G2511-115 (12000 r/min) (12000 rpm) 8423031701



## **MARNING**

## Read all safety warnings and instructions

Failure to follow the safety warnings and instructions may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference



# **Table of Contents**

Proc	duct Information	4
	General Information	4
	Safety signal words	4
	Warranty	4
	ServAid	4
	Website	5
	Safety Data Sheets MSDS/SDS	5
	Product safety video for grinders	5
	Installation of Vibrating Tools	5
	Country of Origin	5
	Dimensional Drawings	5
	Overview	6
	Technical Product Data	6
	Service Overview	6
	Replacement of vanes	
	Maintenance and service instructions	6
	Service recommendations	6
Insta	allation	7
	Installation Requirements	7
	Air Quality	7
	Air Lubrication Guide	7
	Compressed Air Connection	7
	Installation Instructions	7
	Visual inspection - tools and accessories	7
	Visual inspection - air installation	8
	Installation of Vibrating Tools	8
One	ration	9
Opo	Ergonomic guidelines	
	Configuration Instructions	
	Adjusting the wheel guard	
	Operating Instructions	
	Free speed check	
	Start	
Som	/ice1	
Serv	Maintenance Instructions	
	Maintenance and service instructions	
	Service recommendations	
	Replacement of vanes	
	Lubrication Instructions	
	Rust protection and cleaning	
	Lubricating guide	
	Dismantling/Assembling Instructions	
	Instructions for vane motor	
	1113ti dollotto 101 vario 1110tol	_

Recycling	15
Environmental Regulations	15

## **Product Information**

### General Information

#### WARNING Risk of Property Damage or Severe Injury

Ensure that you read, understand and follow all instructions before operating the tool. Failure to follow all the instructions may result in electric shock, fire, property damage and/or severe bodily injury.

- ▶ Read all Safety Information delivered together with the different parts of the system.
- ▶ Read all Product Instructions for installation, operation and maintenance of the different parts of the system.
- Read all locally legislated safety regulations regarding the system and parts thereof.
- ▶ Save all Safety Information and instructions for future reference.

## Safety signal words

The safety signal words Danger, Warning, Caution, and Notice have the following meanings:

DANGER	DANGER indicates a hazardous situation which, if not avoided, <b>will</b> result in death or serious injury.
WARNING	WARNING indicates a hazardous situation which, if not avoided, <b>could</b> result in death or serious injury.
CAUTION	CAUTION, used with the safety alert symbol, indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.
NOTICE	NOTICE is used to address practices not related to personal injury.

## Warranty

- Product warranty will expire 12 months after the product is first taken into use, but will in any case expire at the latest 13 months after delivery.
- Normal wear and tear on parts is not included within the warranty.
  - Normal wear and tear is that which requires a part change or other adjustment/overhaul during standard tools maintenance typical for that period (expressed in time, operation hours or other-
- The product warranty relies on the correct use, maintenance, and repair of the tool and its component
- Damage to parts that occurs as a result of inadequate maintenance or performed by parties other than Atlas Copco or their Certified Service Partners during the warranty period is not covered by the warranty.
- To avoid damage or destruction of tool parts, service the tool according to the recommended maintenance schedules and follow the correct instructions.
- Warranty repairs are only performed in Atlas Copco workshops or by Certified Service Partners.

Atlas Copco offers extended warranty and state of the art preventive maintenance through its ToolCover contracts. For further information contact your local Service representative.

For electrical motors:

Warranty will only apply when the electric motor has not been opened.

#### ServAid

ServAid is a portal that is continuously updated and contains Technical Information, such as:

- Regulatory and Safety Information
- Technical Data

- Installation, Operation and Service Instructions
- Spare Parts Lists
- Accessories
- Dimensional Drawings

Please visit: https://servaid.atlascopco.com.

For further Technical Information, please contact your local Atlas Copco representative.

#### Website

Information concerning our Products, Accessories, Spare Parts and Published Matters can be found on the Atlas Copco website.

Please visit: www.atlascopco.com.

## Safety Data Sheets MSDS/SDS

The Safety Data Sheets describe the chemical products sold by Atlas Copco.

Please consult the Atlas Copco website for more information www.atlascopco.com/sds.

## Product safety video for grinders

Learn more about safety features on Atlas Copco grinders and what measures the operator has to take for a safe operation. Click the link or scan the QR code below to view the video:

https://www.youtube.com/watch?v=XK dHwli8-Q



## **Installation of Vibrating Tools**

We recommend using a minimum length of 300 mm (12") of flexible hose for compressed air between a vibrating tool and the quick-action coupling.

## **Country of Origin**

For the Country of Origin, please refer to the information on the product label.

## **Dimensional Drawings**

Dimensions Drawings can be found either in the Dimensional Drawings Archive, or on ServAid.

Please visit: http://webbox.atlascopco.com/webbox/dimdrw or https://servaid.atlascopco.com.

#### Overview

## **Technical Product Data**

Technical Product Data can be found on either ServAid, or the Atlas Copco website. Please visit: https://servaid.atlascopco.com or www.atlascopco.com.

#### Service Overview

## Replacement of vanes

Replace the vanes in the motor when a power drop of the tool is experienced. If the vanes are not replaced in time other motor parts may be damaged. For increased life length of the vanes use an oil lubricator to dose oil into the air inlet.

#### Maintenance and service instructions

The service must only be done by authorized workshops or qualified service technicians.

#### WARNING Polymer hazard

The vanes in this product contain PTFE (a synthetic fluoropolymer). Due to wear, there might be PTFE particles inside the product. Heated PTFE can produce fumes which may cause polymer fume fever with flu-like symptoms, especially when smoking contaminated tobacco.

Health and Safety recommendations for PTFE must be followed when handling vanes and other components:

- Do not smoke when servicing this product
- ▶ PTFE-particles must not come in contact with open fire, glow or heat
- ▶ Motor components must be washed with cleaning fluid and not blown clear with an air line
- Wash your hands before starting any other activity

#### Service recommendations

Preventive maintenance is recommended at regular intervals. See the detailed information on preventive maintenance. If the product is not working properly, take it out of service and inspect it.

If no detailed information about preventive maintenance is included, follow these general guidelines:

- Clean appropriate parts accurately
- Replace any defective or worn parts

## Installation

## Installation Requirements

## **Air Quality**

- For optimum performance and maximum product life we recommend the use of compressed air with a maximum dew point of +10°C (50°F). We also recommend to install an Atlas Copco refrigeration type air dryer.
- Use a separate air filter which removes solid particles larger than 30 microns and more than 90% of liquid water. Install the filter as close as possible to the product and prior to any other air preparation units to avoid pressure drop.
- For impulse/impact tools make sure to use lubricators adjusted for these tools. Regular lubricators will add too much oil and therefore decrease the tool performance due to too much oil in the motor.
- Make sure that the hose and couplings are clean and free from dust before connecting to the tool.
- Both lubricated and lubrication free products will benefit from a small quantity of oil supplied from a lubricator.

#### Air Lubrication Guide

Brand	Air lubrication
Atlas Copco	Optimizer (1 liter) 9090 0000 04
Q8	Chopin 46
Shell	Shell Air Tool Oil S2 A 320

## **Compressed Air Connection**

### WARNING Risk of severe injury

Air under pressure can cause injury.

- ▶ Always shut off the air supply when not in use or before any adjustments.
- ▶ Drain the hose of air pressure and disconnect the tool from air supply when not in use or before any adjustments.
- ▶ Always use the correct hose size and air pressure for the tool.

#### ★ WARNING Compressed Air

High air pressure can cause severe damage and bodily injury.

- ▶ Do not exceed maximum air pressure.
- ▶ Make sure that there are no damaged or loose hoses or fittings.

For correct air pressure and hose size, see the Technical Product Data on - <a href="https://servaid.atlascopco.com">https://servaid.atlascopco.com</a> or <a href="https://servaid.atlascopco.com">www.atlascopco.com</a>.

1 Make sure that the hose and couplings are clean and free from dust before connecting to the tool.

## Installation Instructions

### Visual inspection - tools and accessories

Inspect the tool and its parts visually before use.

The parts in the list below may vary depending on model.

- Wheel guard or Backing pad
- Adapters, nuts or flange washers
- Support handle
- Throttle lever and security mechanism
- Autobalancer
- Spindle

Look for any damage, grease or oil leakage that can compromise the safety of the tool.

## Visual inspection - air installation

Inspect the air installation visually from the supply point to the tool before use.

- Hose
- Couplings
- System pressure
- Air filter

Look for any damage that can compromise the safety of the tool.

## **Installation of Vibrating Tools**

We recommend using a minimum length of 300 mm (12") of flexible hose for compressed air between a vibrating tool and the quick-action coupling.

## **Operation**

## Ergonomic guidelines

Consider your workstation as you read through this list of general ergonomic guidelines and see if you can identify areas for improvement in posture, component placement, or work environment.

- Take frequent breaks and change work positions frequently.
- Adapt the workstation area to your needs and the work task.
  - Adjust for convenient reach range by determining where parts or tools should be located to avoid static load.
  - Use workstation equipment such as tables and chairs appropriate for the work task.
- Avoid work positions above shoulder level or with static holding during assembly operations.
  - When working above shoulder level, reduce the load on the static muscles by reducing the weight of the tool, using for example torque arms, hose reels or weight balancers. You can also reduce the load on the static muscles by holding the tool close to the body.
  - Make sure to take frequent breaks.
  - Avoid extreme arm or wrist postures, particularly for operations requiring a degree of force.
- Adjust for convenient field of vision by minimizing movement of the eyes and head during the work task.
- Use the appropriate lighting for the work task.
- Select the appropriate tool for the work task.
- Use ear protection equipment in noisy environments.
- Use high-quality inserted tools or consumables to minimize exposure to excessive levels of vibration.
- Minimize exposure to reaction forces.
  - When cutting:

A cut-off wheel can get stuck if the wheel is either bent or if it is not guided properly. Make sure to use the correct flanges for cut-off wheels and avoid bending the wheel during cut-off operation.

When drilling:

The drill might stall when the drill bit breaks through. Makes sure you use support handles if the stall torque is too high. The safety standard ISO11148 part 3 recommends using something to absorb the reaction torque above 10 Nm for pistol grip tools and 4 Nm for straight tools.

- When using direct-driven screw or nutrunners:
  - Reaction forces depend on tool setting and joint characteristics. The ability to bear reaction forces depends on the operator's strength and posture. Adapt the torque setting to the operator's strength and posture and use a torque arm or reaction bar if the torque is too high.
- Use dust extraction system or mouth protection mask in dusty environments.

## **Configuration Instructions**

## Adjusting the wheel guard

#### **⚠ DANGER Risk of Injury**

There is a risk of injury if the tool is used without the wheel guard.

- Always use the tool with the recommended wheel guard.
- ▶ Make sure that the wheel guard is positioned correctly and not damaged.

#### MARNING Risk of injury

- ▶ Always shut off air supply, drain hose of air pressure and disconnect tool from air supply when not in use, before changing accessories or when making repairs.
- Always wear protective gloves when changing accessories or when making repairs.

#### Instructions


- 1. Pull and hold the wheel guard lock button.
- 2. Turn the wheel guard in a suitable position. Position the wheel guard between yourself and the grinding wheel.

## **▲ WARNING Risk of injury**

- Make sure that the wheel guard is put in a suitable position before operating the tool.
- 3. Release the wheel guard lock button and make sure that the wheel guard is safely attached.


## **Operating Instructions**

## Free speed check

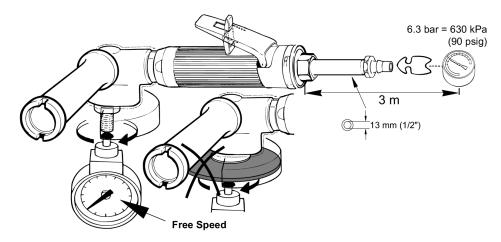

Model Min r/min Max r/min

## **Start**

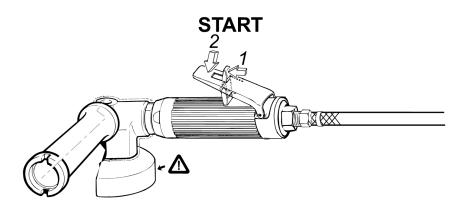

203350

## **Service**

#### Maintenance Instructions

#### Maintenance and service instructions

The service must only be done by authorized workshops or qualified service technicians.

## ▲ WARNING Polymer hazard

The vanes in this product contain PTFE (a synthetic fluoropolymer). Due to wear, there might be PTFE particles inside the product. Heated PTFE can produce fumes which may cause polymer fume fever with flu-like symptoms, especially when smoking contaminated tobacco.

Health and Safety recommendations for PTFE must be followed when handling vanes and other components:

- ▶ Do not smoke when servicing this product
- ▶ PTFE-particles must not come in contact with open fire, glow or heat
- Motor components must be washed with cleaning fluid and not blown clear with an air line
- Wash your hands before starting any other activity

#### Service recommendations

Preventive maintenance is recommended at regular intervals. See the detailed information on preventive maintenance. If the product is not working properly, take it out of service and inspect it.

If no detailed information about preventive maintenance is included, follow these general guidelines:

- Clean appropriate parts accurately
- Replace any defective or worn parts

#### Replacement of vanes

Replace the vanes in the motor when a power drop of the tool is experienced. If the vanes are not replaced in time other motor parts may be damaged. For increased life length of the vanes use an oil lubricator to dose oil into the air inlet.

#### Lubrication Instructions

#### Rust protection and cleaning

Water in the compressed air can cause rust. To prevent rust we strongly recommend to install an air dryer.

Water and particles can cause sticking of vanes and valves. This can be prevented by installing an air filter close to the product to avoid pressure drop.

Before longer standstills always protect your tool by adding a few drops of oil into the air inlet. Run the tool for 5–10 seconds and absorb any access oil at the air outlet in a cloth.

NOTICE Do not try to clear the air path using sharp tools.

The air inlet is equipped with a strainer. If this is punctured, foreign objects may harm the valves, resulting in overspeed.

## Lubricating guide

Use lubricants of good quality. The oils and greases listed in the lubrication table are examples of lubricants that can be recommended.

Brand	General purpose Bearings
BP	Energrease LS-EP2
Castrol	Spheerol EP L2
Esso	Beacon EP2
Q8	Rembrandt EP2
Mobil	Mobilegrease XHP 222
Shell	Alvania EP2
Texaco	Multifak EP2
Molycote	BR2 Plus

## Dismantling/Assembling Instructions

## Instructions for vane motor


#### WARNING Polymer hazard

The vanes in this product contain PTFE (a synthetic fluoropolymer). Due to wear, there might be PTFE particles inside the product. Heated PTFE can produce fumes which may cause polymer fume fever with flu-like symptoms, especially when smoking contaminated tobacco.

Health and Safety recommendations for PTFE must be followed when handling vanes and other components:

- ▶ Do not smoke when servicing this product
- ▶ PTFE-particles must not come in contact with open fire, glow or heat
- ▶ Motor components must be washed with cleaning fluid and not blown clear with an air line
- ▶ Wash your hands before starting any other activity

### Dismantling

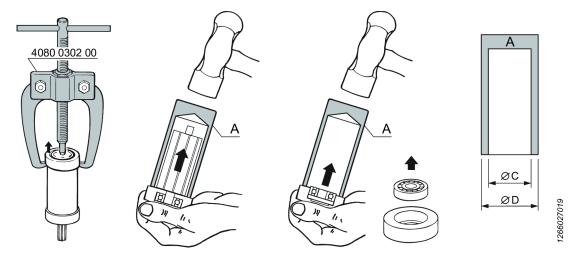


Service tools are also included in the Basic Service Tools set. For further information see ordering No. 9835 5485 00

#### **Dismantling tool Mandrel A**


Ordering No.	Ø D	ø c
4080 0182 01	7	3.5
4080 0182 02	8	4.5
4080 0182 03	9	5.5

Ordering No.	Ø D	ø c
4080 0182 04	10	6.5
4080 0182 05	13	8.5
4080 0182 06	16	10.5
4080 0182 07	19	12.5
4080 0182 08	22	15.5
4080 0182 09	24	17.5
4080 0182 10	26	20.5
4080 0182 11	30	25.5
4080 0182 12	35	30.5
4080 0182 13	40	35.5
4080 0182 14	47	40.5

## Inspection of motor parts

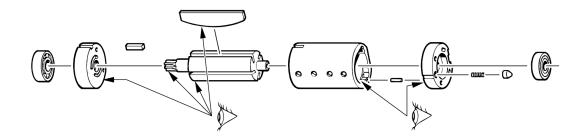

## Assembling - According to Bäckströms method

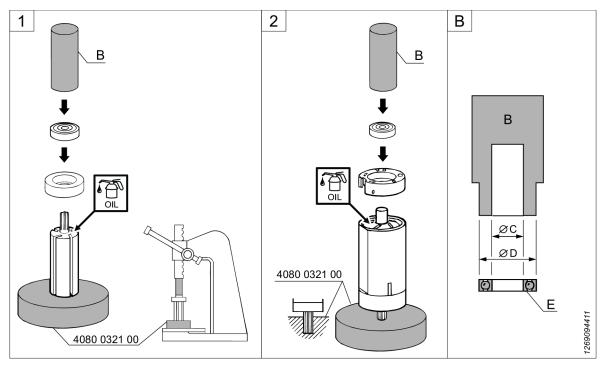

E: Ball bearing

Service tools are also included in the **Basic Service Tools** set. For further information see ordering No.  $9835\ 5485\ 00$ 

9090315

## **Dismantling tool Mandrel B**

Ordering No.	Ø D	ø c
4080 0567 04	12.5	5.2
4080 0567 11	14.5	6.5
4080 0567 01	15.5	5.2
4080 0567 05	18.5	6.2
4080 0567 02	18.5	8.2
4080 0567 06	21.5	7.5
4080 0567 03	21.5	8.2
4080 0567 07	25.5	10.5
4080 0567 08	27.5	12.5
4080 0567 09	31.5	15.5
4080 0567 10	34.5	18.5

# Recycling

## **Environmental Regulations**

When a product has served its purpose it has to be recycled properly. Dismantle the product and recycle the components in accordance with local legislation.


Batteries shall be taken care of by your national battery recovery organization.





SE-10523 STOCKHOLN Sweden

Telephone: +46 8 743 95 00 Telefax: +46 8 644 90 45 www.atlascopco.com



Out of respect to wildlife and nature, our technical literature is printed on environmentally friendly paper.

